

Congratulations on purchasing an eZIP® track blind system. Its an investment in your lifestyle which if treated properly will give you many years of problem free performance. The eZIP® track blind system is made up of a variety of components including cast and extruded aluminium, pvc and nylon. Each of these products have been engineered for external use as long as they receive basic care and maintenance. (The blind should also have an outdoor rated fabric fitted and will have its own care and maintenance program. Refer your retail blind dealer for this detail)



LinX
Automation


amazon alexa




works with the
Google Assistant

IFTTT

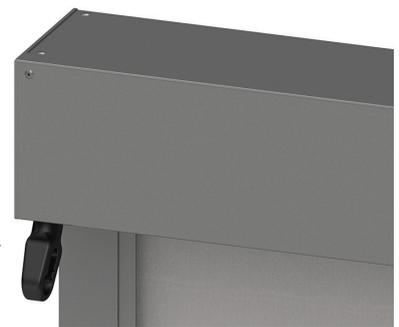

Hey Siri

Motorised

- ▶ Your LinX motor has 3 control options. A dedicated remote control handset that comes with a cradle that can be attached to a wall or via the LinX Wi-fi hub you can operate it thru your mobile phone (requires the Connector+® app or IFTTT) or voice controlled with your relevant smart device. (e.g Siri, Google assistant or Amazon Alexa).
- ▶ Your installer will program the motorised control system to ensure your eZIP® blind operates either individually or simultaneously
- ▶ Your motorised eZIPS® will automatically stop when lowering and taking up.
- ▶ Stop your eZIPS® at any height that suits you.
- ▶ If you lose power, do not try to force the eZIPS® up manually, wait until power has been restored.
- ▶ The remote batteries may need to be replaced periodically.
- ▶ Contact your dealer for any assistance.

Crank

- ▶ Cranks are super strong and reliable. No need to bend down to the bottom rail.
- ▶ Your eZIPS® will be fitted with a ring at the top corner and a handle to operate them.
- ▶ Your installer will show you how to operate the blinds.
- ▶ Hold the handle with two hands (one on each grip) and hook onto the ring.
- ▶ Turn the handle to wind your eZIP® down and reverse to wind your eZIP® up.
- ▶ Stop your eZIPS® at any height that suits you.
- ▶ Remove the crank handle and store in a safe place nearby.
- ▶ Once your eZIPS® are fully down, wind back the other way slightly, to fully tension the fabric.
- ▶ If you accidentally overwind when bringing the eZIP® down, there may be slack in your fabric. This is easy to rectify, just wind back the other way, until you re-tension the fabric again.
- ▶ If you have any difficulty winding, contact your dealer for assistance.



Spring

- ▶ Spring eZIPS® are easy to operate. Ideal widths are up to 4m.
- ▶ As the blinds are always under tension, ensure you assist the bottom rail when moving up and down.
- ▶ Your locking handle may be operated from one or both sides of your eZIP®, depending on your application.
- ▶ Turn the handle to release and guide the bottom rail up or down to the desired position.
- ▶ You will hear the bottom rail lock into position and release the handle back to a horizontal position.



Care and maintenance

- ▶ As a rule, eZIP® track blinds will perform better when used regularly and not left up for long periods. Should you use infrequently you may find that the fabric may show pressure marks and may need time to re-settle. To operate at its best eZIP® track blinds need to be clean and free of debris. It is recommended to periodically hose out at normal tap pressure, the exposed extrusions with clean water and allowed to dry.
- ▶ Should the tracks need lubrication, silicon spray is recommended however it must be used in accordance with the silicone spray suppliers' recommendations, which includes testing a small inconspicuous area first to ensure no detrimental side effects.
- ▶ Use a soft brush or cloth to clean the hardware. Never use abrasive sponges or solvent type cleaners (turps, kerosene, paint thinners) on componentry or Powder Coated surfaces. Using such agents will void the warranty.

Track Care

- ▶ eZIP® will perform better when used regularly and not left up for long periods.
- ▶ Should you only use your eZIP® occasionally, the fabric may need a little time to re-settle.
- ▶ To keep the tracks clean and free of debris, it is recommended to periodically hose out with clean water and allow to dry.
- ▶ Should the tracks need lubrication, silicon spray is recommended.
- ▶ Use a soft brush or cloth to clean the hardware. Never use abrasive sponges or solvent type cleaners (turps, kerosene, paint thinners) on componentry or Powder Coated surfaces.



Fabric Care

- ▶ While not responsible for any fabrics used on the eZIP® track blind the way a fabric is maintained will contribute to the overall performance of the system. Fabrics can retain a memory so leaving the blind down for a period of time will generally re-settle the fabric.
- ▶ In the absence of specific care instructions from the fabric supplier, most external fabrics can be washed with a hose at normal tap pressure. A soft cloth or brush with a very mild detergent could also be used.
- ▶ An outdoor cleaning glove may be helpful in removing any dirt if used with mild pressure taking care to not stretch or leave marks on the fabric. A chamois may help dry and polish Mesh or PVC fabrics. Never use high pressure cleaners or harsh chemicals on your fabrics.
- ▶ While regular washing and maintenance is recommended to ensure your eZIP® operates at its best, it is important to let your blinds dry out properly before rolling them up to avoid mould or deterioration.



Extreme Weather

eZIP®'s are designed to perform and will handle moderate winds, however, common sense should prevail. All eZIP® blinds should be taken up in the event of a storm or extreme wind environment. They should never be left at half way position during such weather events and if necessary to operate in windy conditions, ensure they are brought up individually to avoid a large gust of wind in an enclosed area.

Warranty

- ▶ eZIP® Track Blinds® are backed by a 5-year warranty on components, 5-year on Motors and 3-year on Remotes and Sensors.
- ▶ Warranty does not cover damage arising from misuse, lack of maintenance, incorrect installation, or adverse weather conditions.

Authorised eZIP® Dealer